

Hybrifix® 302

How to order

Hybrifix®302 is available in 290 ml cartridges packed per 12 in a box. To order your specific Hybrifix®302, please find below the article and EAN codes:

Colour:	Article code:	EAN code:
White	12003623	8711595176071
Grey	12003624	8711595176095
Black	12003626	8711595176118

Natural Stone applications

Hybrifix®302 Hybrid Adhesive & Natural Stone is applicable on natural stone and other porous surfaces. Due to the fact that Hybrifix®302 does not contain plasticisers, contamination of the adjacent contact surfaces



Hybrifix® 302 Hybrid Adhesive & Natural Stone- No surface contamination

A product that contains plasticizers does show after time surface contamination of the adjacent surfaces



Centre of Excellence

Better results through Knowledge

Den Braven 's company payoff is "Better results through Knowledge". Our Centre of Excellence accumulates knowledge which provides her with the latest market insights, developments and trends. This knowledge is shared within the Den Braven Group and amongst our customers and end-users.

This process enables our relations to achieve higher efficiency and better results. This is the true meaning of "Better results through Knowledge". Visit our website to discover more about what the Centre of Excellence could mean for you!



Den Braven



Hybrifix® 302

Hybrid adhesive & natural stone

High quality sealant and adhesive for building and industry applications


Hybrifix® 302

Hybrid adhesive & natural stone

High quality sealant and adhesive for building and industry applications



- Plasticizer free
- No staining or discolouring on natural stone
- Fast curing
- Extreme adhesion on almost all building materials
- ISEGA certified
- Emicode EC1 Plus

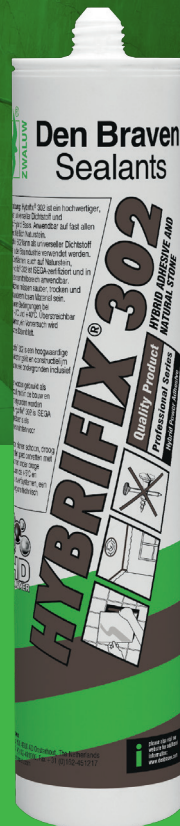

Hybrifix® 302

Product Descriptions

Hybrifix®302 Hybrid Adhesive & Natural Stone is a high quality, professional and universal sealant and adhesive based on hybrid technology which cures under influence of humidity to form a durable elastic rubber.

Applications

Hybrifix®302 Hybrid Adhesive & Natural Stone has been especially developed as an universal sealant for connection joints in building and industry. Universal construction adhesive for bonding many building materials such as natural stone, concrete, mirrors, glass, plasterboard, PU, uPVC, hard plastics, enamel, ceramic, metals, stainless steel and more. Sealing and bonding in cold storage cells and in food area. Suitable for mechanically loaded expansion joints and bridging joint systems.



Hybrifix® 302

Certifications

EN 15651-1: F-EXT-INT-CC 20HM

EN 15651-3: S XS3

Emicode EC 1 PLUS

ISEGA

Technical Performances

Density	1,42 g/ml
Shore A harness	60°
Skin formation	10 minutes
Elongation at break	300%
100% modulus	1,60 Mpa
Tensile strength	2,60 Mpa
Curing time	2-3 mm/24 hours

Visit our website to download the full technical specifications of the Hybrifix®302.



Visit Den Braven YouTube channel

Den Braven offers a wide variety of USP, application and commercial movies via our website and YouTube channel. Scan the below QR Code to visit the USP movie of the original Hybrifix®302:

